查询PC6172W-12C供应商

Automotive Twin PCB Power Relay — PC617



FEATURES

- 20 Amp continuous current capacity
- Up to 60 amp switching capacity
- Six different contact forms
- Designed for high inrush applications
- Four different contact materials available
- UL Class F insulation available
- Dust cover or sealed version available

CONTACT RATINGS

Form		1 Form A (SPST NO)	1 Form B (SPST NC)	1 Form C (DPDT) NO	1 Form C (DPDT) NC	1 Form U (SPST-NO-DM)	1 Form V (SPST-NC-DB)	1 Form W (SPDT-DB-DM) NO	1 Form W (SPDT-DB-DM) NC
Max Switching Current	Make	60 Amps	12 Amps	60 Amps	12 Amps	2 X 40 Amps	2 X 8 Amps	2 X 30 Amps	2 X 5 Amps
	Motor	20 Amps	10 Amps	20 Amps	10 Amps	2 X 20 Amps	2 X 7 Amps	2 X 15 Amps	2 X 5 Amps
Max. Continuous Current		20 Amps	10 Amps	20 Amps	10 Amps	2 X 10 Amps	2 X 7 Amps	2 X 7 Amps	2 X 5 Amps
Minimum Load		.05 Amps @ 5 VDC							
Max. Switching Voltage		See curve page 2, current dependant							

CONTACT DATA

Material		AgNiO 15 (Silver Nickel Oxide 15%), AgSnOInO (Silver Tin Oxide Indium Oxide)
Initial Contact Resistance		100 milliohms max @ 0.1A, 6VDC
Service Life	Mechanical	1×10^7 Operations
	Electrical	1×10^5 Operations

CHARACTERISTICS

Operate Time	10 ms. typical
Release Time	5 ms. typical
Insulation Resistance	100 megohms min, at 500VDC, 50%RH
Dielectric Strength	1500 Vrms, 1 min. between coil and contacts
Shock Resistance	10 g, 11ms, functional; 100 g, destructive
Vibration Resistance	DA 1.5 mm, 20 - 200 Hz functional
Drop Resistance	1 Meter height drop on concrete in final enclosure
Power Consumption	2 x 1.1 W approx.
Ambient Temperature Range	-40 to 85 degrees C operating, -40 to 125 storage
Weight	20 grams approx.

COIL DATA

Coil Voltage	Resistance ohms ± 10%	Must Operate Voltage Max. (VDC) A, B, C, U, V	Must Operate Voltage Max. (VDC) W	Allowable Voltage Max (VDC)	Must Release Voltage Min. (VDC) B, V	Must Release Voltage Min. (VDC) A, C, U, W
6	36 X 2	3.75	4.5	8	0.35	0.7
12	145 X 2	7.50	9.0	16	0.70	1.4
24	576 X 2	15.0	18.0	31	1.40	2.8

3220 Commander Drive, Suite 102, Carrollton, Texas 75006
Sales: Call Toll Free (888)997-3933 Fax (818) 342-5296 email: pickerwest@sbcglobal.net URL: pickercomponents.com

REFERENCE CURVES

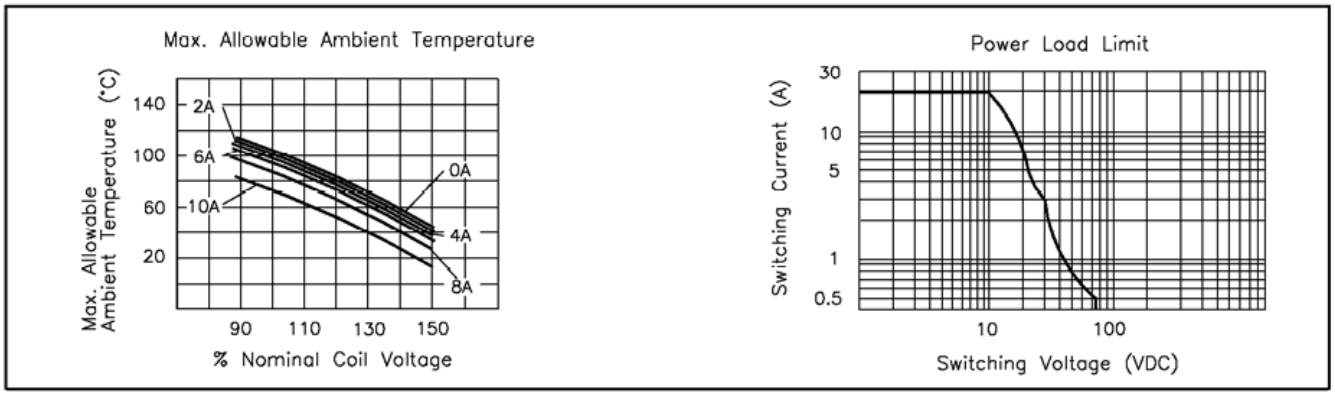

ORDERING INFORMATION

Example:	PC617	-2C	-12	S	T

Model

Contact Form
2A, 2B, 2C, 2U, 2V or 2W

Coil Voltage

Enclosure
Nil: Open Frame; S: Sealed; C: Dust Cover

Contact Material
Nil: AgSnO; C: AgCdO; T: AgSnOInO

Dimensions in Inches (millimeters) drawings are 2 X scale

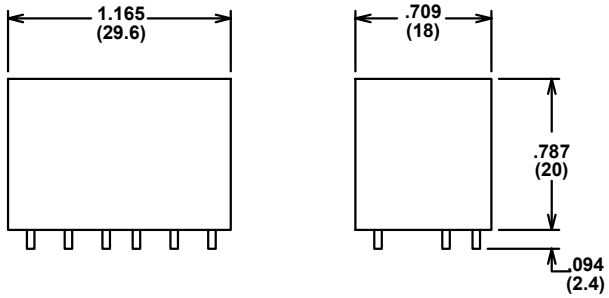

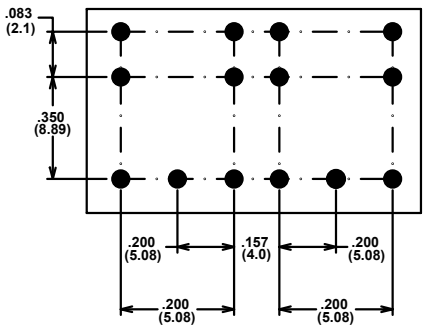

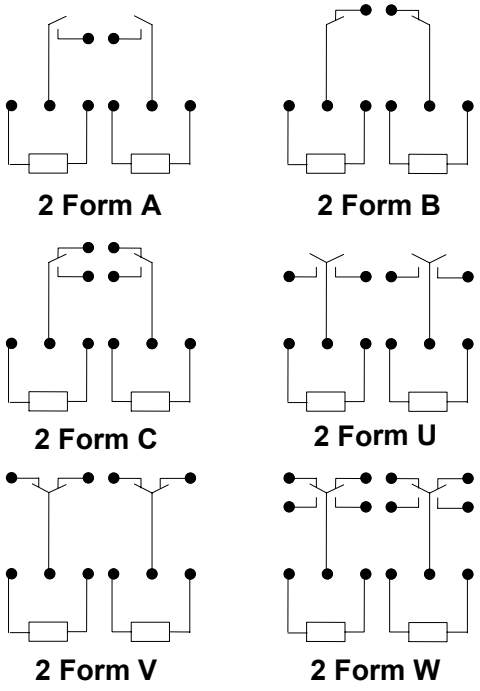

Notes:

Tolerances ± .010 unless otherwise noted

PICKER COMPONENTS

3220 Commander Drive, Suite 102, Carrollton, Texas 75006

Sales: Call Toll Free (888) 997-3933 Fax (818) 342-5296 email: pickerwest@sbcglobal.net URL: pickercomponents.com